



DS Series **CATALOGUE**

Latest edition

Proudly designed, engineered and
manufactured in SPAIN





DS Series

The DS series offer a full range horn loaded cabinet and a extremely high power sub-bass enclosure, both specifically designed for club and discotheque installs.

Manufactured as standard with premium birch plywood and finished with high-resistant water based black paint it can also be manufactured in any colour or finish to compliment any install design.

The DS cabinets are designed to not only be pleasing to the eye but also to the ear.

They have the special feature that can be made in any colour that you need.

DS-12

Technical Data



- Colour and finishing options
- High performance
- Two way system
- Self powered version optional

Available in any colour and finish you like, the DS-12 is designed to not only be pleasing to the eye but also to the ear.


The horn loaded, high power DS-12 is primarily designed for installations, especially clubs/discos, is bi-amplified and can also be manufactured as a self-powered version to deliver all the features such as FIR that Lynx Pro audio electronics deliver.



DS-12	
Components	LF/MF 1x12" + 1.4" titanium diaphragm HF driver
Frequency Range	130 Hz – 20 KHz
Frequency Response	150 Hz – 18 KHz (± 3 dB)
Max. SPL*	130 dB / 133 dB peak
Coverage Angle	60° H x 40° V
Rated Power	Low/Mid: 500W - High: 60W
Program Power	Low/Mid: 1000W - High: 120W
Crossover	1450 Hz
Nominal Impedance	Low/Mid: 8 Ω - High: 8 Ω
Shape	Trapezoidal
Connectors	2 x Neutrik speakon NL4MP
Construction	15mm Premium birch plywood
Finish	Different colours and finishing options
Dimensions	649 x 499 x 482 mm (H x W x D)
Weight	32 Kg (70 lbs)


* Calculated based on power rating and measured sensitivity

Available in any colour and finish you like

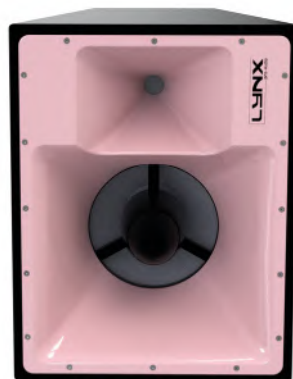

DS-18S

Technical Data

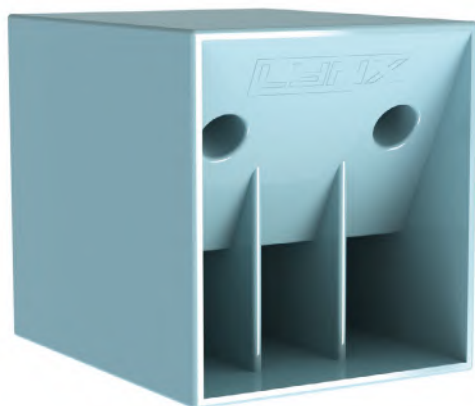

- Incredible power to size ratio
- Colour and finishing options
- High performance 1400 W

The DS-18S is an extremely high power subwoofer cabinet providing exceptional low frequency reinforcement for the DS-12. It uses one 18" (4" DUO voice coil) transducer with aluminium demodulating ring in direct radiation bass reflex configuration.


It can also be manufactured in any colour or finish to compliment any install design.



DS-18S	
Components	LF 1 x 18"
Frequency Range	30 Hz - 250 Hz
Frequency Response	35 Hz - 200 Hz (± 3 dB)
Max. SPL*	133 dB / 136 dB peak
Coverage	360° single unit
Rated Power	1000 W
Program Power	2000 W
Nominal Impedance	8 Ω
Construction	18 mm Premium Birch plywood
Finish	Different colours and finishing options
Dimensions	639 x 585 x 733 mm (H x W x D)
Weight	42 Kg (92 lbs)

* Calculated based on power rating and measured sensitivity

Available in any colour and finish you like

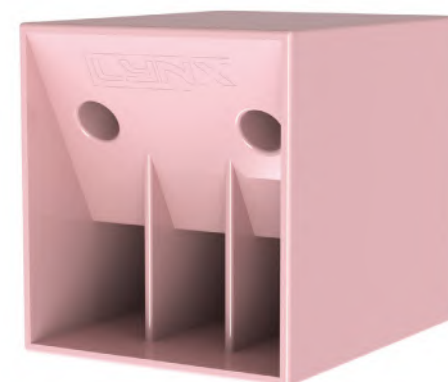



MYA Club in Valencia, Spain

MYA is a nightclub with an elegant concept located in El Umbracle, in a privileged area of the city. Lynx Pro Audio placed eight DS-12 speakers and twelve DS-18S in the BEATS room.



QB Series

The QB series comprises one two-way, passive full range cabinet and one subwoofer and is the smallest series that Lynx Pro Audio offers, designed and intended for background sound reinforcement where the power of the HR or BS series is not required.

The components have been carefully selected to offer a lightweight, versatile series, delivering a linear phase response with excellent sound distribution and fidelity for background installations in bars, restaurants, conferences etc.

The Full Range cabinet is supplied with high frequency OCPP protection (over current passive protection) whilst the subwoofer model comes with SWR (stationary wave reduction) to reduce internal stationary waves.

Both cabinets are finished in rugged, premium birch plywood with a polyurea coating. The QB-5 is protected by front steel grills and backed with a special dark grey triple layer, acoustical textile which allows greater air flow and reduces heat and humidity.

Software

Prediction, control, DSP updates, management system...all our softwares are designed in-house and are a fundamental part of the Lynx Pro Audio technology. They are designed by and for sound technicians, with a very intuitive interface easy to use.

Masters of DSP technology and one of the few companies in the world that develops its own digital processing systems. This allows us to control all internal processing, from gain to crossover, dynamics, etc.

Online Control System (OCS)



Control and monitoring software for multiple devices (loudspeakers, amplifiers and processors). Allows control via Ethernet / USB for Lynx Pro Audio systems with integrated DSP.

It controls the powered cabinets in real time and obtain detailed information of cabinet behavior.

ARK Software



The ARK software works via USB or Ethernet (cable or wireless) and is the interface to configure all the parameters of the range of processors ARK-70 and ARK-20 series.

The ARK software has been completely designed at the Lynx Pro Audio laboratory by our own engineers. It allows you to configure every one of the parameters in the processor, being in "Real Time" or "Offline", storing them in the processor via the USB interface or ETHERNET.

Cabinet Updater



Connect the cabinet by USB to your PC. The Cabinet Updater software will automatically detects your cabinet hardware and updates the presets to the latest and optimum configuration available.

Rainbow 3D



Rainbow 3D is an electro-acoustical prediction software for loudspeaker systems, boasting comprehensive high-speed simulation in a three-dimensional environment. With a sophisticated design, Rainbow 3D stands out for its speed, being able to do a simulation in a few seconds.


Thanks to this software you will be able to "virtually" determine the acoustical response of one or various cabinets at the same time.

Online Control System (OCS)

OCS is our control software, **working in real time for all our digital processing systems**. It is a user interface enabling the set-up of all digital devices in an installation.

With OCS you can configure / monitor all the parameters of a self-powered Lynx Pro Audio system (input levels, cabinet angles, module temperature, compression levels....), all parameters available in our processors and all settings for our HPX amplifiers, **from the input sensitivity to the digital process for each channel independently**. You can change the preset, gain, mute and polarity, activate the weather compensation and the SOLO mode.

OCS enables configuration from one single software system for all devices connected to an Ethernet network and incorporates direct communication with Smart(R) measurement system. **Through our Smart Link we can connect to any of Smart(R) session connected to the local network**. This allows us to see, in real time, the captured measurement directly in our process window.

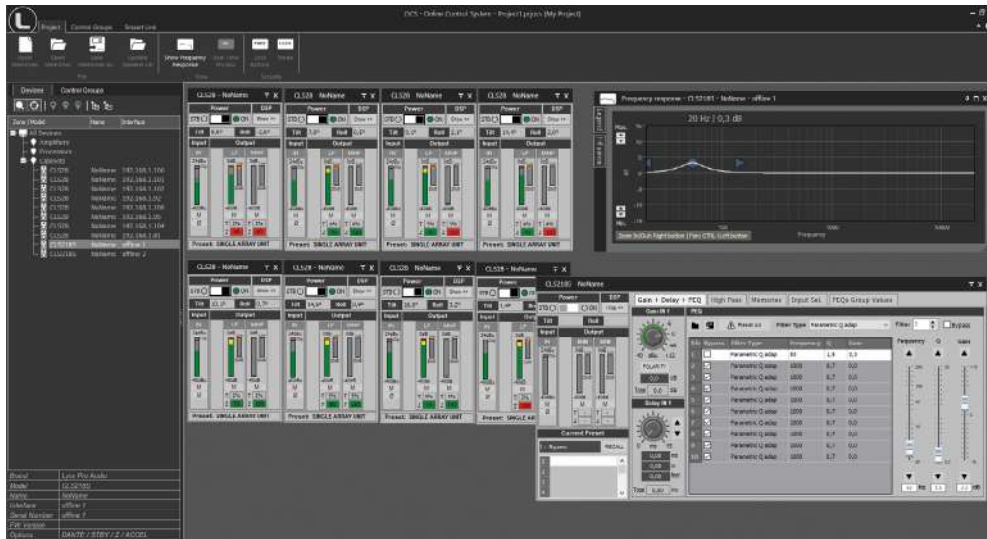

Control and monitoring software for multiple devices (loudspeakers, amplifiers and processors). Allows control via Ethernet / USB for Lynx Pro Audio systems with integrated DSP.

• Who is it for?

Users of Self powered DSP incorporated Lynx Pro Audio Cabinets where the user has requested the cabinets to be supplied with the Ethernet Module kit.

• What is it for?


Obtain detailed information of cabinet behaviour and monitor the cabinet/s in real time through the users PC so you can control online a single cabinet or a complete cabinet system from the OCS window. You can apply a Parametric EQ with 6 filters totally configurable, insert a delay up to 90 ms, change the preset, gain, mute, polarity and phase of every cabinet connected. You can also activate the air absorption compensation and select the «SOLO» mode.

• How does it work?

Via Ethernet (cable or wireless). Once installed, the OCS software automatically detects all the cabinets connected to the network and displays them in the OCS window on the users PC.

• What does it show?

As well as displaying the cabinet model and IP address the OCS will be monitoring in real time and the user will be able to view RMS levels, compression and output levels per way, delay, EQ, power module temperature, air absorption compensation and cabinet angulation.

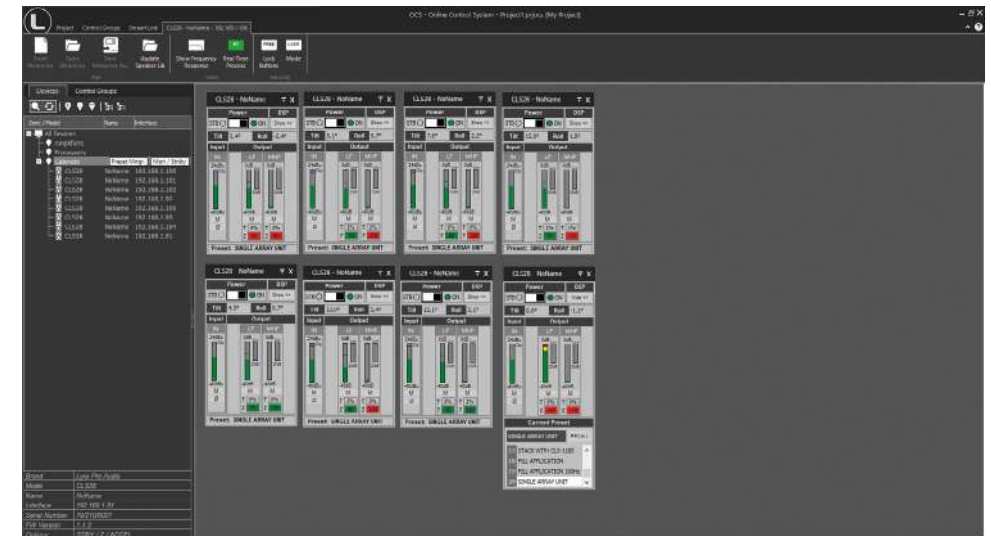

Rainbow 3D Electroacoustical prediction software

Rainbow 3D is an **electro-acoustical prediction software for loudspeaker systems**, boasting comprehensive **high-speed simulation in a three-dimensional environment**. With a sophisticated design, Rainbow 3D stands out for its speed, being able to do a simulation in a few seconds.

Being a technology that has been developed in-house by our engineers, we are able to adapt to the needs of our clients, make improvements when necessary and develop new tools. Rainbow 3D is an ongoing project that will be constantly adding new features.

- **Designed from scratch by professionals**

Despite the existence of the previous Rainbow 2D, this new software has been coded from scratch by our engineers in order to achieve an ultra-fast simulation and to create a visually rich 3D environment. The simulation takes advantage of all cores in the computer using multi-threading techniques for optimised calculation speed.

The program can simulate all Lynx Pro Audio's acoustic enclosures located in a 3D space. New spherical measurements of the loudspeakers have been performed, with up to one degree of accuracy, in the recently built anechoic chamber.

- **Complex-shaped surfaces**

The program can simulate all Lynx Pro Audio's acoustic enclosures located in a 3D space, including the classic side and top views. It can also define multiple listening zones and allows offset positioning and symmetry.

You can create complex-shaped surfaces as listening zones (venues): trapezoidal forms, semicircles, circles, rectangles and other asymmetrical forms. Each corner in a 4-vertex surface is independently definable as straight or round.


- **Blueprints, textures and ornaments**

Blueprints can be loaded and used as a reference point or template on which reproduce the venue more closely to reality.

Furthermore, you can add textures and ornaments (decorative 3D objects) that you will find in the library to make the project more realistic and visually appealing.

- **Create projects with endless zones**

You can create customized designs using multiple edition and productivity tools: create surfaces, duplicate, apply symmetry on X and Y, show/hide surfaces, change dimensions, change position, change rotation, take screenshots, etc.

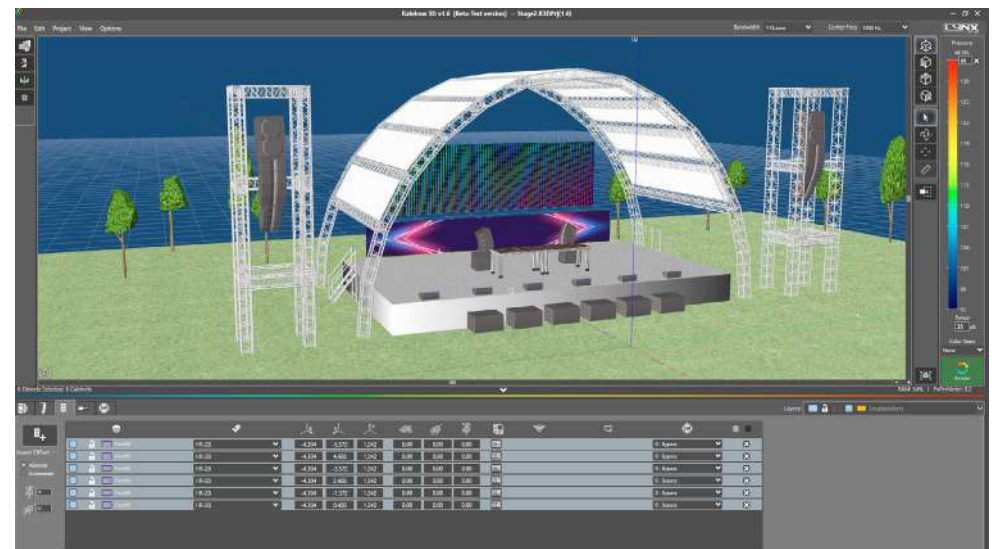

- **Unlimited sound sources**

Allows the acoustic simulation for an unlimited number of sound sources and audio systems.

You can place as many systems (subwoofers, line arrays, columns and individual cabinets) as you desire or you can create your own group of customized sound systems.

Line arrays can be placed in stack or flown configuration. Also, you can create clusters from any individual cabinet available in the library.

- **Create your own “Sound Systems”**

You can select different models of cabinets from the library, create a group with the desired configuration and save them as a sound system. In this way, you can create a group of customized sound systems with your own configurations and reuse them in other projects, saving time.

To make this possible, you will need to create a “system” file. This can be integrated upon other projects with the “Load sound system from file” option or you can import it directly into the library to get access whenever you need it with the “Insert sound system” option.

When you create a Sound System, you can add a name, a description and you have the chance to upload a picture.

- **Organisation by layers**

To work in a more organized way you can create multiple layers, with different names and colors to distinguish them. All elements within a layer can be selected and/or moved among them. You can also lock a layer, delete it or disable the speakers for simulation.

- **DSP process over sound sources**



Adding DSP process to sound sources to make corrections and optimize sound, using EQ filters, delay, gain and polarity inversion. In the near future, direct communication with Lynx Pro Audio’s cabinets will be available.


- **Multiple measures and tools**

Likewise, the R&D department is developing multiple measurements and analysis tools for the calculated data. For example, adding virtual microphones that show the frequency response in the points of location indicated.

Among other tools you will find a wizard to set up different line array arrangements, a tool for line array autoplay and a ruler to take measurements (meters) in the 3D scene.

A PDF report can be generated with extensive information that includes 3D views of the project as well as a list of surfaces and loudspeakers with set-up data and EQ.

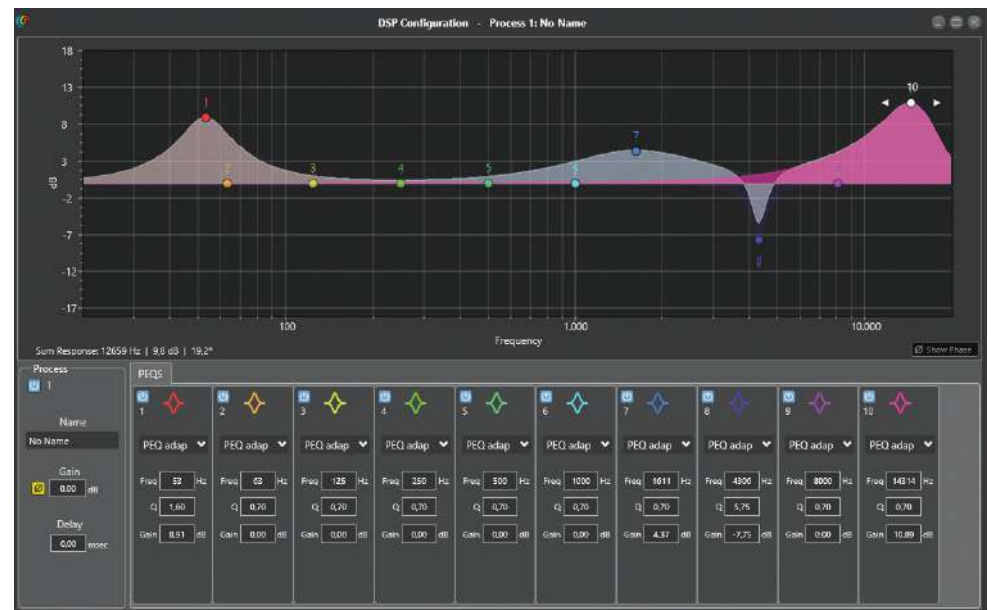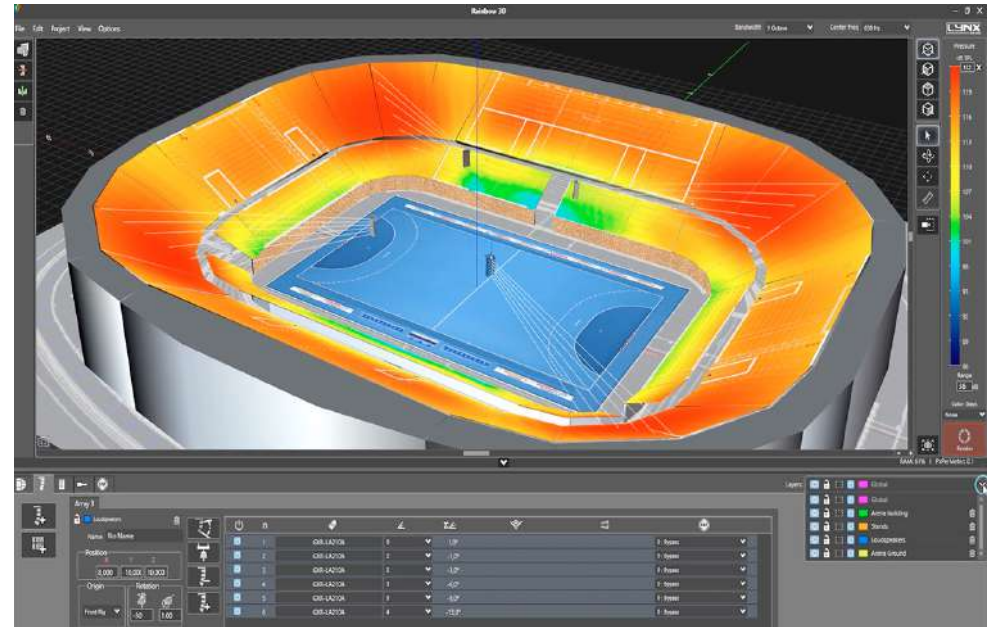

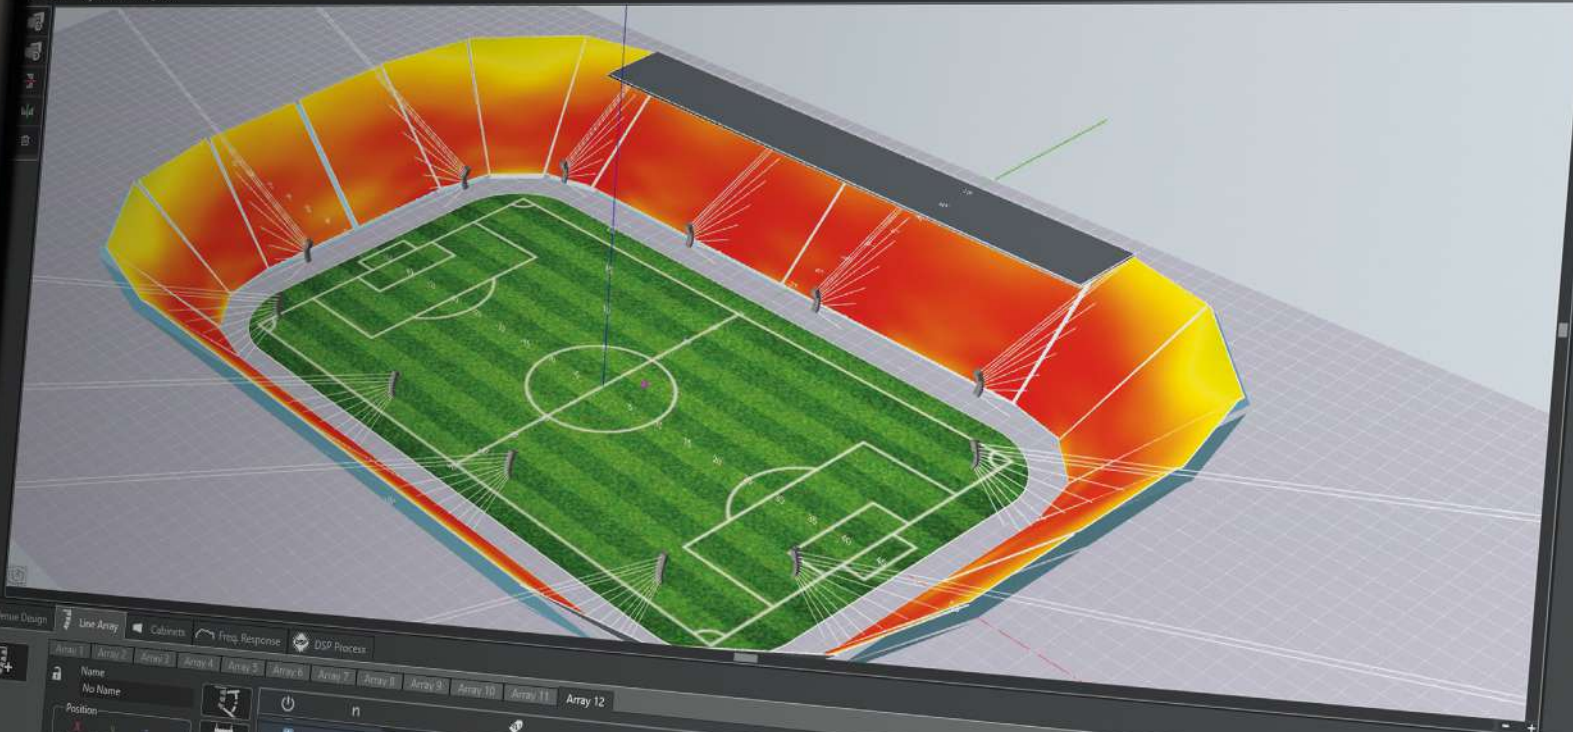

Venue Design

- Line Array
- Cabinets
- Freq. Response
- DSP Process

- Array 1
- Array 2
- Array 3
- Array 4
- Array 5
- Array 6
- Array 7
- Array 8
- Array 9
- Array 10
- Array 11
- Array 12

Name: No Name

Position: X: -44.64, Y: -14.47, Z: 7.62

Rotation: 180, 19.00


Mounting: Flows

n	Model	Gain	Angle	Process	Filter
4	GXR-LA10A			1: Internal DSP	
5	GXR-LA10A	5	14.0°	1: Internal DSP	0: Bypass
6	GXR-LA10A	7	7.0°	1: Internal DSP	0: Bypass
7	GXR-LA10A	10	-3.0°	1: Internal DSP	0: Bypass
8	GXR-LA10A	10	-13.0°	1: Internal DSP	0: Bypass
9	GXR-LA10A	10	-23.0°	1: Internal DSP	0: Bypass
10	GXR-LA10A	10	-33.0°	1: Internal DSP	0: Bypass
10	GXR-LA10A	10	-43.0°	1: Internal DSP	0: Bypass

1 Octave
1000 Hz



Follow us on

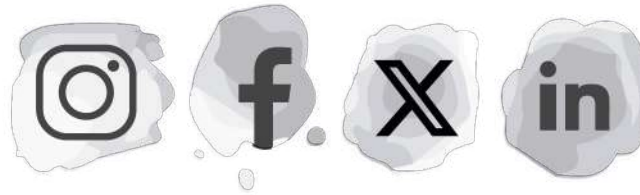

or visit our website

www.lynxproaudio.com

Lynx Pro Audio S.L

Calle 1. Pol. Ind. Picassent
Picassent, Valencia
46220 SPAIN

Tel: +34 961 109 601
Mail: info@lynxproaudio.com
Web: www.lynxproaudio.com

