

Compact & versatile, easy to use, easy to install and portable speaker. 4" coaxial speaker offering a coverage of 90° conical dispersion and 109 dB SPL.



Key features

- Compact & versatile
- Easy to use, easy to install
- Portable
- Available in black or white

Applications

- PA system
- Clubs & theatres
- Houses of worship
- Solo artists, band, DJ
- Public address
- Commercial complex

General description & specifications

The CPS-4 is a passive coaxial speaker in an ultra-compact enclosure designed to deliver a clear and balanced sound for short throw applications.

CPS-4 is a two-way passive point source system with a 4" coaxial transducer mounted in a closed enclosure that produces a 90° conical dispersion without secondary lobes over the whole frequency range.


Due to its small size and sleek design, this system suits very well indoor installation and also can be used as background sound reinforcement.

Weight has been left as low as possible providing easy set ups in fixed installation as well as easy transport for portable applications.

Technical Data

Components	1 x 4" coaxial speaker
Frequency range	120 Hz - 20 KHz (-10dB)
Sensitivity	86 dB (1W@1m)
Max SPL	106 dB / 112 dB peak
Coverage	90° conical dispersion
Power	100 W AES (200 W program, 400 W peak)
Nominal Impedance	16 Ω
Connectors	1 x NEUTRIK Speakon NL4 / 4 x Terminal Block 7.62 mm between pins
Finish	Polyurea coating - available in RAL colour on demand
Material	9 mm premium birch plywood
Dimensions	122 x 122 x 131 mm (H x W x D)
Weight	1.5 Kg (3.3 lbs)

Dimensional Drawing

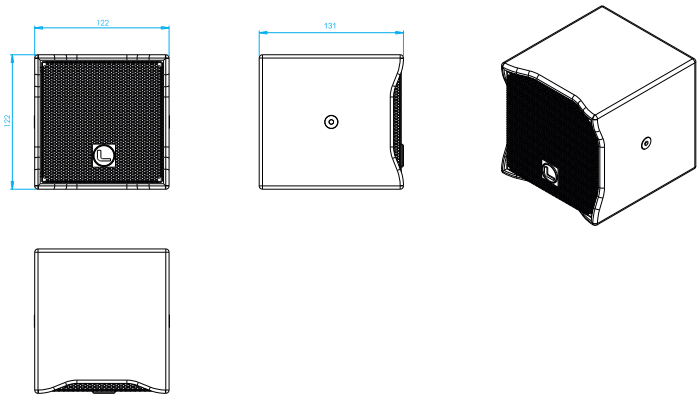

Accessories

	MS-5CX	Quick Coupler for 3/8" to 5/8" stand
	UBR-CPS4	Wall bracket for the CPS-4
	SP-5CX	35mm Speaker pole to 3/8" male thread