

Ultra-compact, passive column speaker with 12 x 3" (0.75" voice coil) neodymium transducers. 15° +/- 5° vertical coverage. 121dB SPL.



Key features

- Compact & versatile
- Powered from the sub unit
- DSP presets for wide applications
- Weather proof components
- Easy to use, easy to install
- Portable
- Available in black or white

Applications

- PA system
- Clubs & theatres
- Houses of worship
- Solo artists, band, DJ
- Public address
- Commercial complex

General description & specifications

The Ionic-100 is a passive column speaker part of the Ionic series. The Ionic columns are compact, modular and powerful and the complete series includes two columns & two subwoofers.

The Ionic-100 uses 12 x 3" (0.75" voice coil) neodymium transducers offering a coverage of 15° +/- 5° V x 100° H and 121dB SPL.

Weight has been left as low as possible providing easy set ups in fixed installation as well as easy transport for portable applications.

The Ionic-100 is powered from the subwoofer units which include a Digital Signal Processor offering different presets to cover a wide range of sound applications.

Technical Data


Components	12 x 3" speaker with 0.75" voice coil
Frequency range	150 Hz - 20 KHz (-10dB)
Frequency response	180 Hz - 18 KHz (± 3dB)
Sensitivity	96 dB (1W@1m)
Max SPL	121 dB / 127 dB peak
Coverage	15° ± 5° V x 100° H
Power	300 W AES (600 W program, 1200 W peak)
Nominal Impedance	8 Ω
Connectors	2 x NEUTRIK Speakon NL4
Finish	Epoxy paint / bespoke pattern
Material	1.5 mm stainless steel
Dimensions	1000 x 89 x 117 mm (H x W x D)
Weight	13 Kg (29 lbs)

RAL colours and water-vinyl customization






Available in RAL colours by request. In addition, more customization options for the Ionic 100 and Ionic 50 cabinets are available. These are some patterns and designs in water-vinyl:

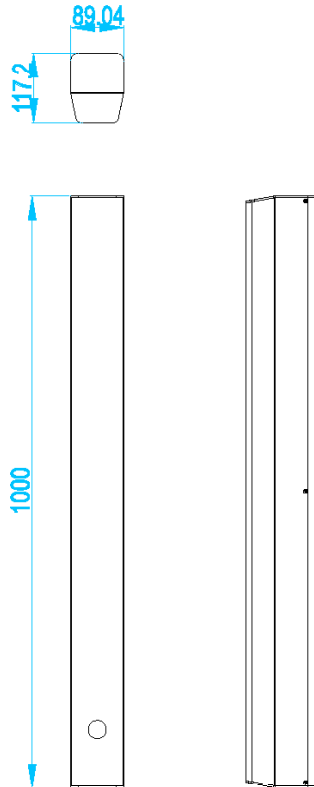

Dimensional Drawing



Accessories

	SV-22	Piece to connect 2 columns together – Straight
	SV-23	Piece to connect columns to wall or truss
	SV-POLE	35mm inclinable Pole adaptor
	SV-I2S	Sub adaptor for satellite, combine columns with sub
	SV-21	Column cabinets connection – inclinable
	WB-I20	Wall bracket for column installation – inclinable
	FC-IONIC	Flight case for 2 ionic-100 plus accessories